


3-Wire Miniature 3-Leiter Miniatur

shielded
bündig
Ø 4 mm | 0.8 mm




standard



shielded
bündig
Ø 4 mm | 0.8 mm




standard

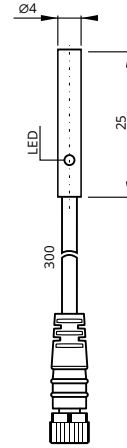

shielded
bündig
Ø 4 mm | 1.5 mm



increased
erhöht



Sensing Distance	Schaltabstand	0.8 mm	0.8 mm	1.5 mm
Housing Size	Gehäusegröße	Ø 4 mm	Ø 4 mm	Ø 4 mm
Operating Voltage	Betriebsspannung	10...30 V _{DC}	10...30 V _{DC}	10...30 V _{DC}
Reverse Polarity Protection	Verpolungsschutz	built-in integriert	built-in integriert	built-in integriert
Current Consumption	Stromverbrauch	<8 mA	<8 mA	<8 mA
Current Load Capability	Ausgangsbelaastbarkeit	200 mA	200 mA	200 mA
Short Circuit Protection	Kurzschlusschutz	built-in integriert	built-in integriert	built-in integriert
Voltage Drop	Spannungsabfall	<1.5 V @ 200 mA	<1.5 V @ 200 mA	<1.5 V @ 200 mA
Switching Frequency	Schaltfrequenz	2000 Hz	2000 Hz	2000 Hz
Correction Factor	Korrekturfaktor	Alu 0.45 · Brs 0.50 · VA 0.85	Alu 0.45 · Brs 0.50 · VA 0.85	Alu 0.45 · Brs 0.50 · VA 0.85
Repeatability	Wiederholgenauigkeit	<1% (S _n)	<1% (S _n)	<1% (S _n)
Hysteresis	Hysterese	3...15%	3...15%	3...15%
Operating Temperature	Betriebstemperatur	-25...+75 °C	-25...+75 °C	-25...+75 °C
Protection Class	Schutzklasse	IP67	IP67	IP67
Sensing Face	Sensorfläche	POM	POM	POM
Housing Material	Gehäusewerkstoff	SS303 Edelstahl	SS303 Edelstahl	SS303 Edelstahl
Connection	Anschluss	PUR, ultra-flex	PUR, 300 mm, M8	PUR, ultra-flex
Switching Indicator	Schaltanzeige	built-in integriert	built-in integriert	built-in integriert
Article Code PNP, NO	—/—	INSD4S08PO25-A2P	INSD4S08PO25-3U8	INSD4S1.5PO25-A2P
Article Code PNP, NC	—/—	INSD4S08PC25-A2P	INSD4S08PC25-3U8	INSD4S1.5PC25-A2P
Article Code NPN, NO	—/—	INSD4S08NO25-A2P	INSD4S08NO25-3U8	INSD4S1.5NO25-A2P
Article Code NPN, NC	—/—	INSD4S08NC25-A2P	INSD4S08NC25-3U8	INSD4S1.5NC25-A2P

shielded
bündig
Ø 4 mm | 1.5 mm



increased
erhöht

shielded
bündig
M5×0.5 | 0.8 mm



standard

shielded
bündig
M5×0.5 | 0.8 mm



standard

shielded
bündig
M5×0.5 | 0.8 mm








standard

shielded
bündig
M5×0.5 | 1.5 mm



increased
erhöht

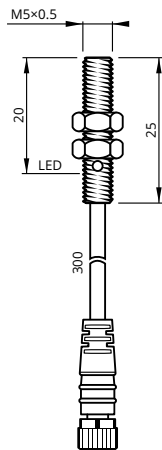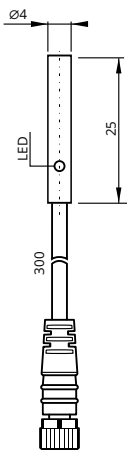

1.5 mm	0.8 mm	0.8 mm	0.8 mm	1.5 mm
Ø 4 mm	M5×0.5	M5×0.5	M5×0.5	M5×0.5
10...30 V _{DC}	10...30 V _{DC}	10...30 V _{DC}	10...30 V _{DC}	10...30 V _{DC}
built-in integriert	built-in integriert	built-in integriert	built-in integriert	built-in integriert
<8 mA	<8 mA	<8 mA	<8 mA	<8 mA
200 mA	200 mA	200 mA	200 mA	200 mA
built-in integriert	built-in integriert	built-in integriert	built-in integriert	built-in integriert
<1.5 V @ 200 mA	<1.5 V @ 200 mA	<1.5 V @ 200 mA	<1.5 V @ 200 mA	<1.5 V @ 200 mA
2000 Hz	2000 Hz	2000 Hz	2000 Hz	2000 Hz
Alu 0.45 · Brs 0.50 · VA 0.85	Alu 0.45 · Brs 0.50 · VA 0.85	Alu 0.45 · Brs 0.50 · VA 0.85	Alu 0.45 · Brs 0.50 · VA 0.85	Alu 0.45 · Brs 0.50 · VA 0.85
<1% (S _n)	<1% (S _n)	<1% (S _n)	<1% (S _n)	<1% (S _n)
3...15%	3...15%	3...15%	3...15%	3...15%
-25...+75 °C	-25...+75 °C	-25...+75 °C	-25...+75 °C	-25...+75 °C
IP67	IP67	IP67	IP67	IP67
POM	POM	POM	POM	POM
SS303 Edelstahl	SS303 Edelstahl	SS303 Edelstahl	SS303 Edelstahl	SS303 Edelstahl
PUR, 300 mm, M8	PUR, ultra-flex	PUR, 300 mm, M8	PUR, 300 mm, M8	PUR, ultra-flex
built-in integriert	built-in integriert	built-in integriert	built-in integriert	built-in integriert
INSD4S1.5PO25-3U8	INS5S08PO25-A2P	INS5S08PO25-3U8	INS5S08PO40-M8	INS5S1.5PO25-A2P
INSD4S1.5PC25-3U8	INS5S08PC25-A2P	INS5S08PC25-3U8	INS5S08PC40-M8	INS5S1.5PC25-A2P
INSD4S1.5NO25-3U8	INS5S08NO25-A2P	INS5S08NO25-3U8	INS5S08NO40-M8	INS5S1.5NO25-A2P
INSD4S1.5NC25-3U8	INS5S08NC25-A2P	INS5S08NC25-3U8	INS5S08NC40-M8	INS5S1.5NC25-A2P

Minor changes possible
Geringfügige Änderungen möglich